



Protran® PR3920

Subsea Differential
Pressure Transmitter



- Silicon-on-Sapphire sensor technology for outstanding performance
- Standard sensing range 0-50 bar DP (0-750 psi DP)
- 690 bar (10,000 psi) line pressure
- 1,200 bar (17,400 psi) secondary containment
- Submersion to 9,850 ft (3,000 m) sea level
- High accuracy option
- NACE corrosion resistance
- Hyperbaric testing and Environmental Stress Screening (ESS Testing)
- ATEX/IECEx option available (includes M1 for mining applications)



Description

The PR3920 differential pressure transmitter provides very accurate low pressure wet-wet differential pressure measurement on extremely high line pressure sources. Designed for permanent installation in very demanding subsea applications the housing is completely sealed to resist 300 bar external pressure. Intended for submersion in pressurised dielectric oil with seawater for monitoring of subsea well control valves or hydraulic pressure measurement.

The unique Silicon-on-Sapphire sensor technology provides outstanding performance and gives excellent stability over a wide temperature range. The advanced sensor design consists of a piezoresistive silicon strain gauge circuit, which is epitaxially grown onto the surface of a sapphire diaphragm to form a single crystalline structure. The sapphire sensor element is then molecularly bonded to a titanium alloy sub-diaphragm. This enables the sensor to endure higher over-pressures and provides superb corrosion resistance. The sensor exhibits virtually no hysteresis and excellent long-term stability. With

outstanding insulation properties, the sapphire substrate allows the sensor to operate over a very wide temperature range without loss of performance.


The PR3920 pressure transmitter provides surface mounting with a stainless steel mounting plate and dual redundant o-ring face seals. Both the high and low pressure ports can withstand 1,000bar overpressure with no damage or loss of performance. The titanium alloy wetted parts provide conformance to NACE corrosion resistance requirements. Electrical connection is via a heavy duty PTFE cable with optional angle of orientation. Output signal is a 4-20 mA, 2 wire current loop which can be powered from an external 10-36 Vdc supply. Application includes control of chemical injection for sub-sea wells for oil and gas extraction.

An optional ATEX and IECEx approved version of this product is available for explosion protection for flammable gases (zone 0), dusts (zone 20) and mining areas (group I M1).

Dimensions

(in mm)

| ELECTRICAL CONNECTION | |
|-----------------------|-------------------|
| Colour | Function |
| Red | Supply (10-36Vdc) |
| Blue | Signal (4-20mA) |

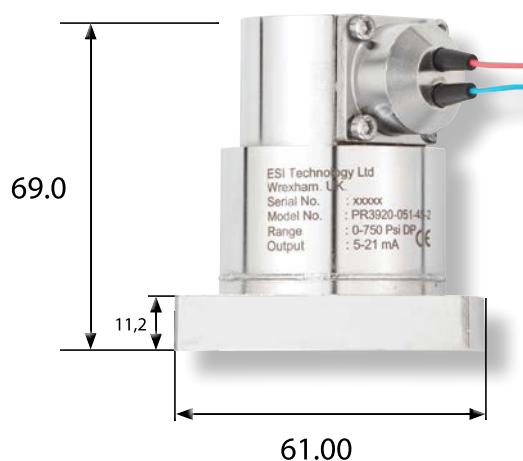

Technical Data

| Type | PR3920 |
|-------------------------------------|---|
| Sensor Technology: | Silicon-on-Sapphire (SoS) |
| Output Signal: | 4-20 mA (2 wire) |
| Supply Voltage: | 10-36 VDC |
| Pressure Reference: | Differential Sealed Gauge |
| Protection of Supply Voltage: | Protected against supply voltage reversal up to 50 V |
| Differential Pressure Range: | 0-750psi (51 barDP) |
| Overpressure Safety: | 1.5x maximum static line pressure for all ranges |
| Secondary Pressure Containment: | 1,200 bar max |
| Common Mode (Static line pressure): | To both ports simultaneously 690bar with less than 1%FS change on output signal. |
| Load Driving Capability: | 4 – 20 mA: $RL < [UB - 10 V] / 20 \text{ mA}$; (e.g. with supply voltage (UB) of 36V, max. load (RL) is 1300 Ω) |
| Accuracy NLHR: | $\leq \pm 0.25 \%$ of span BFSL |
| Zero Offset and Span Tolerance: | $\pm 0.20 \text{ mA}$ |
| Operating Ambient Temperature: | -10°C to +70°C (+14 °F to +158 °F) |
| Operating Media Temperature: | -10°C to +70°C (+14 °F to +158 °F) |
| Storage Temperature: | +5 °C to +40 °C (+41 °F to +104°F) Recommended Best Practice |
| Temperature Effects: | $\pm 3.0\%$ FS total error band for -20°C – +70°C. Typical thermal zero and span coefficients $\pm 0.05\%$ FS/ °C |
| ATEX/IECEx Approval Option: | Ex II 1 G Ex ia IIC T4 Ga (zone 0) Ex II 1 D Ex ia IIIC T135°C Da (zone 20) Ex I M 1 Ex ia I Ma (group 1 M1) |
| ATEX/IECEx Safety Values: | $U_i = 28 \text{ V}$ $I_i = 119 \text{ mA}$ $P_i = 0.65 \text{ W}$ $L_i = 0.1 \mu\text{H}$ $C_i = 74 \text{ nF}$ Temperature Range = -20°C – +70°C Max. cable length = 45 m |
| Electromagnetic Compatibility: | Emissions: EN61000-6-4; Immunity: EN61000-6-2; Certification: CE Marked |
| Insulation Resistance: | $> 1 \text{ G}\Omega$ @ 50 VDC |
| Response time 10-90 %: | 1 mS |
| Operating Environment: | Sealed for immersion in pressurised dielectric fluid up to 300bar and for short periods in seawater. |
| Wetted Parts: | SAE 316 stainless steel and titanium alloy |
| Pressure Media: | All fluids compatible with SAE 316 stainless steel and titanium alloy |
| Corrosion Resistance: | NACE compliant materials |
| Pressure Connection: | Face sealing mounting plate with dual redundant elastomeric O ring seals on both pressure ports. |
| Electrical Connection: | Raychem wire (optional cable outlet orientation available on request) |
| Net. Weight (Kg): | Subject to specification |

DISCLAIMER : ESI Technology Ltd operates a policy of continuous product development. We reserve the right to change specification without prior notice. All products manufactured by ESI Technology Ltd are calibrated using precision calibration equipment, traceable to national measurement standards.