



PROTRAN® PR3441

Submersible Depth/Level Pressure
Transmitter

- Piezoresistive sensor technology for excellent stability and repeatability
- Robust stainless steel construction
- Pressure ranges available from 0-1 mWG
- High Strength, cable for protection against ingress
- ATEX/IECEx option available (includes M1 for mining applications)
- DNV certification available



Optional Approvals



Hazardous Area

ATEX and IECEx approval for explosion protection; flammable gases (zone 0), dusts (zone 20) and mining areas (group I M1).



Marine

DNV-GL marine approvals for marine use has been developed for shipping systems such as marine engines, cargo storage tanks, fuel gauging, fresh water storage, wastewater management, heating, cooling



Specifications


The PROTRAN PR3441 submersible transmitter has been designed for the accurate measurement of the depth and level of liquids in many applications. Standard output signal is 4-20 mA two wire with supply range 13-26 Vdc. Electrical connection is via a high strength polyurethane cable with integral tube for excellent trouble-free venting to the surface atmosphere.

The standard depth transmitter is fitted with a stainless steel nose cone with radial inlet holes to prevent sludge build-up. A magnetic nose cone is available on request. The PR3441 transmitter is suitable for depth and level measurement in boreholes 25 mm diameter or greater. Lightening Protection is available on request.

Typical applications include:

- Borehole level and reservoir level monitoring
- Water mains pressure measurement in inspection chambers
- Power level and outlet pressure measurement on submersible pumps

Dimensions (in mm)

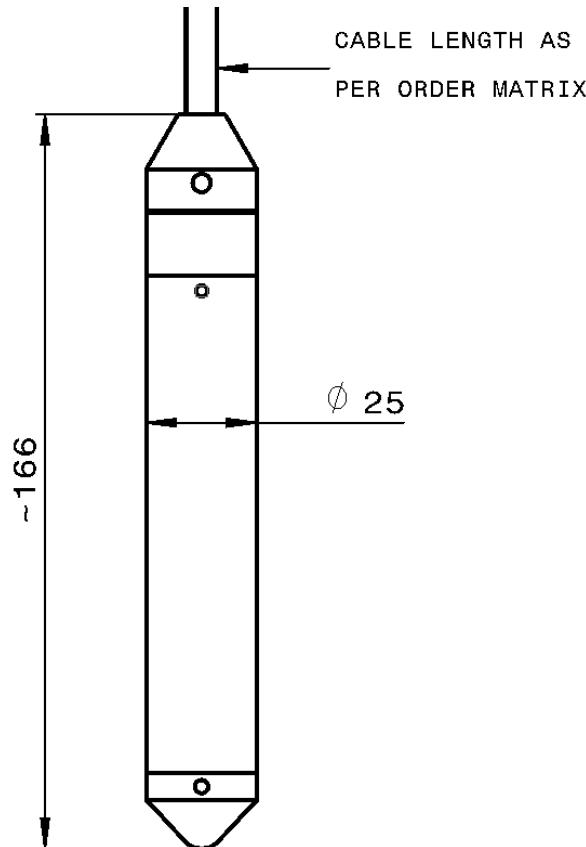

Electrical Connection

mA	
Red	+supply
Blue	4-20 mA signal
Screen	to case

Technical Data

Type	PR3441	PR3445	PR3446		
Sensor Technology:	Isolated Piezoresistive Silicon				
Output Signal:	4-20 mA (2 wire)	0-5 V (4 wire)	0-10 V (4 wire)		
Supply Voltage:	13-36 VDC				
Pressure Reference:	Vented Gauge				
Protection of Supply Voltage:	Protected against supply voltage reversal up to 50 V				
Standard Pressure Ranges (mWG):	0-1 mWG; 0-10 mWG; 0-20 mWG; 0-50 mWG; 0-100 mWG; 0-250 mWG; 0-500 mWG (other options available)				
Standard Pressure Ranges (psi):	0-3 psi; 0-5 psi; 0-7.5 psi; 0-10 psi; 0-15 psi; 0-30 psi; 0-50 psi; 0-100 psi; 0-200 psi; 0-300 psi (other options available)				
Overpressure Safety:	2x all ranges				
Load driving Capability:	4 – 20 mA: $RL < [UB - 13 V] / 20 \text{ mA}$; (e.g. with supply voltage (UB) of 36V, max. load (RL) is 1150 Ω ; 10 mV/V: n/a; 0 – 5 V: max. load $RL > 5 \text{ K}\Omega$; 0 – 10 V: max. load $RL > 10 \text{ K}\Omega$				
Accuracy NLHR:	$\leq \pm 0.3\%$ of span BFSL (Optional higher accuracy version of $\leq \pm 0.15\%$ of span BFSL available)				
Zero Offset & Span Tolerance:	$\pm 0.5\%$ FS at room temperature				
Operating Ambient Temp:	-20°C to +60°C (-4°F to +140°F)				
Operating Media Temperature:	Media must not freeze around the sensor				
Storage Temperature:	+5C to +40C (+41F to +104F) Recommended Best Practice				
Temperature Effects:	$\pm 2.0\%$ FS total error band for -20°C to +60°C. Typical thermal zero and span coefficients $\pm 0.03\%$ FS/°C				
ATEX/IECEx Approval (4-20 mA version only):	EX II 1 G Ex ia IIC T4 GA (Zone 0) Ex II 1 D Ex ia IIIC T135 C Da (Zone 20) Ex I M1 Ex ia Ma (group 1 M1)	n/a			
ATEX/IECEx Safety Values:	Ui = 28 V / Li = 119mA / Pi = 0.65 W / Li = 0.1 pH / Ci = 62 nF. Temperature Range = -20C to +70C. Max. cable length = 105m	n/a			
DNV Approval:	Temperature: D; Humidity: B; Vibration: B; EMC: B; Enclosure: C (contact sales for more information)				
Electromagnetic Compatibility:	Emissions: EN61000-6-4; Immunity: EN61000-6-2; Certification: CE/UKCA Marked				
Insulation Resistance:	> 100 M Ω @ 50 VDC				
Wetted Parts:	SAE 316L stainless steel housing and diaphragm, polyurethane cable and nitrile (NBR) o-ring seal				
Pressure Media:	All fluids compatible with SAE 316L stainless steel, 316 stainless steel, polyurethane and nitrile (NBR)				
Pressure Connection:	Stainless steel nose cone with radial pressure inlets. Magnetic nose cone available on request.				
Electrical Connection:	Submersible black polyurethane cable with integral screen, Kevlar strain cord and vent tube. Conductor size 7/0.20 mm (24 AWG), resistance 8.9 Ω / 100 m (x2)				
Net. Weight (Kg):	0.4 Kg (without cable)				

Order Matrix

Output	Wires	Type	Electrical Connection/ Options	Pressure Range	Process Connection	Cable Length
4-20 mA	2	PR3441				
0-5 V	4	PR3445				
0-10 V	4	PR3446				
Electrical Connections/Options						
No special options			-			
Higher accuracy option			HA			
ATEX/IECEx certified			EX			
DNV Approved			M			
DNV Approved plus ATEX/IECEx certified			EXM			
Pressure Range in mWG						
0-1 mWG				0001		
0-5 mWG				0005		
0-10 mWG				0010		
0-50 mWG				0050		
0-100 Mwg				0100		
0-250 Mwg				0250		
0-500 Mwg				0500		
Process Connection						
Protective nose cone					AX	
Magnetic nose cone					FZ	
1/4" BSP (G1/4)					AB	
Cable Length						
Cable length is specified by adding a 3 digit numeric code as a suffix to the part number e.g '010 = 10 meters. (Max cable length 500 meters).						xxx

Order Number Example

PR3441-0010AX-010

For options not listed please contact the sales team

DISCLAIMER: ESI Technology Ltd operates a policy of continuous product development. We reserve the right to change specification without prior notice. All products manufactured by ESI Technology Ltd are calibrated using precision calibration equipment, traceable to national measurement standards.